



The ZeroLine aluminium ionizer is available in two dimensions, single-row (ZL C) and dual-row (ZL D) emitters. The dual-row model is also available with connection for compressed air (ZL A), for increased range and efficiency.

TECHNICAL DATA:

Material	Aluminium
Length	200 - 2950 mm, in increments of 50 mm
Width	15 mm (ZL C) 30 mm (ZL D) 30 mm (ZL A)
Height	30 mm
Power supply	ZL PU / ZL PU-AL
Operating voltage	4.8 kV, 50-60 Hz
Ingress protection	IP 65

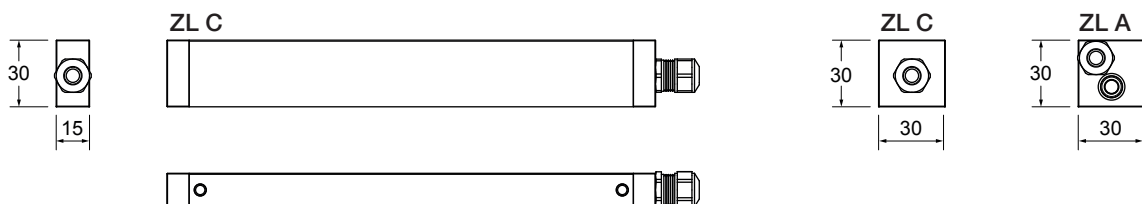

Dimensions

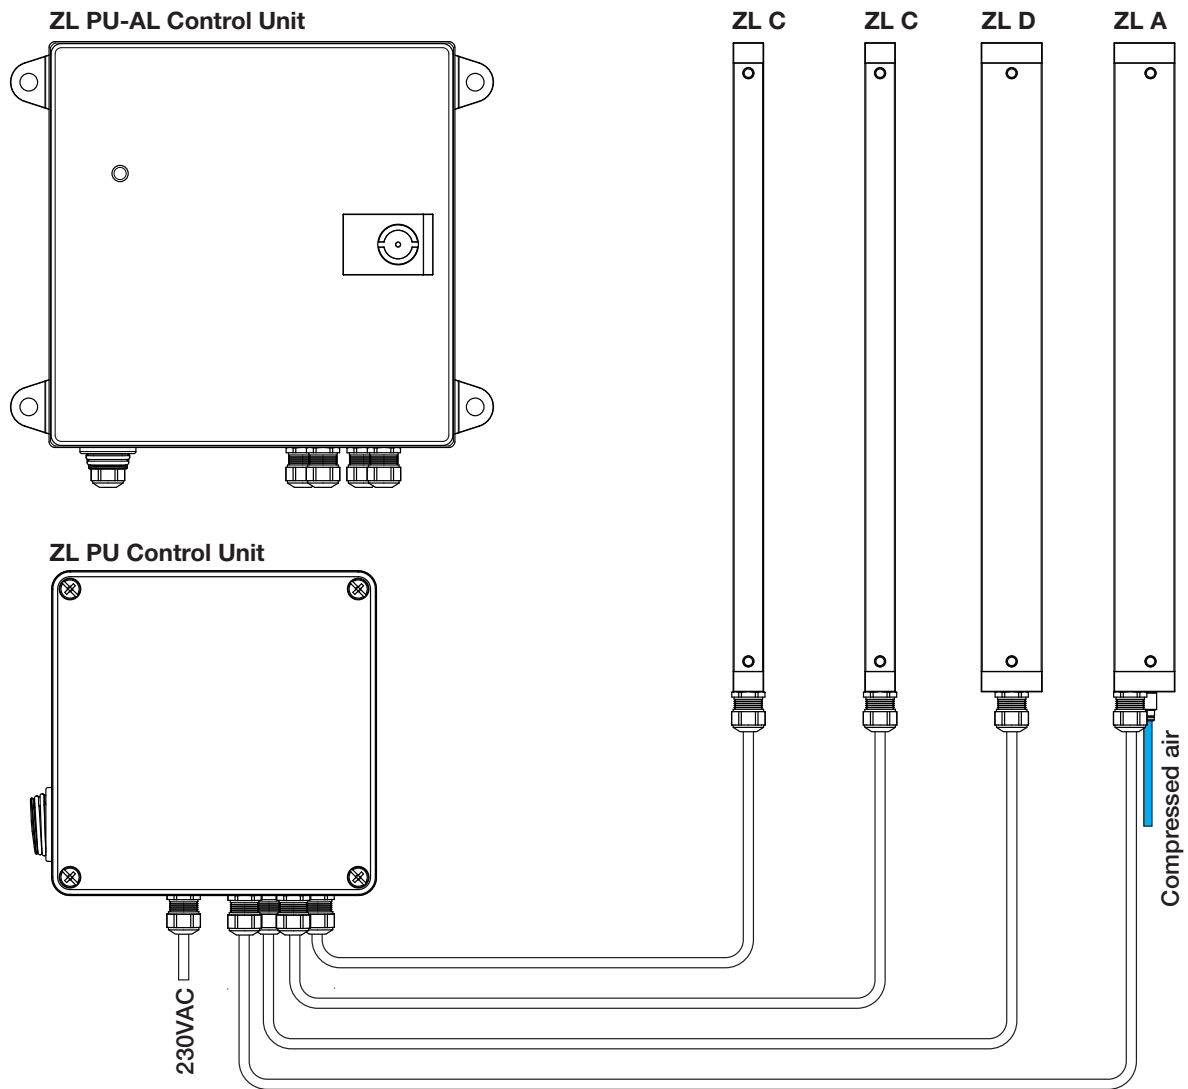

Parts List

ZL C Ionizer

Length: 200 - 2950 mm in 50 mm increments
Order No.: ZL 9410XY

ZL D Ionizer

Length: 200 - 2950 mm in 50 mm increments
Order No.: ZL 9411XY

ZL A Ionizer with Air Connection

Length: 200 - 2950 mm in 50 mm increments
Order No.: ZL 9412XY

ZL PU Control Unit - 4 Outputs

Order No.: ZL 940000

ZL PU-AL Control Unit with Alarm - 4 Outputs

Order No.: ZL 940201

ZL EB14 Splitter 1 in/4 out

Order No.: ZL 940047

ZL HV High Voltage Cable

Length: 1.5 - 20 m

Order No.: ZL 943XYZ

