



The ZeroLine stainless steel ionizer is available in two dimensions, single-row (ZL CSS) and dual-row (ZL DSS) emitters. The dual-row model is also available with connection for compressed air (ZL ASS), for increased range and efficiency.

## TECHNICAL DATA:

Material	Stainless steel
Length	200 - 2950 mm, in increments of 50 mm
Width	15 mm (ZL CSS) 30 mm (ZL DSS) 30 mm (ZL ASS)
Height	30 mm
Power supply	ZL PU / ZL PU-AL
Operating voltage	4.8 kV, 50-60 Hz
Ingress protection	IP 65

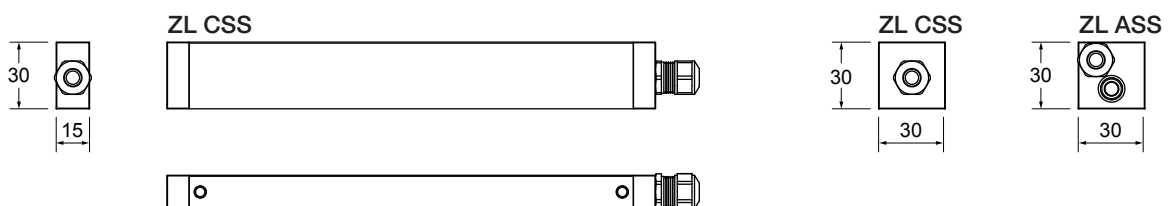

## Dimensions

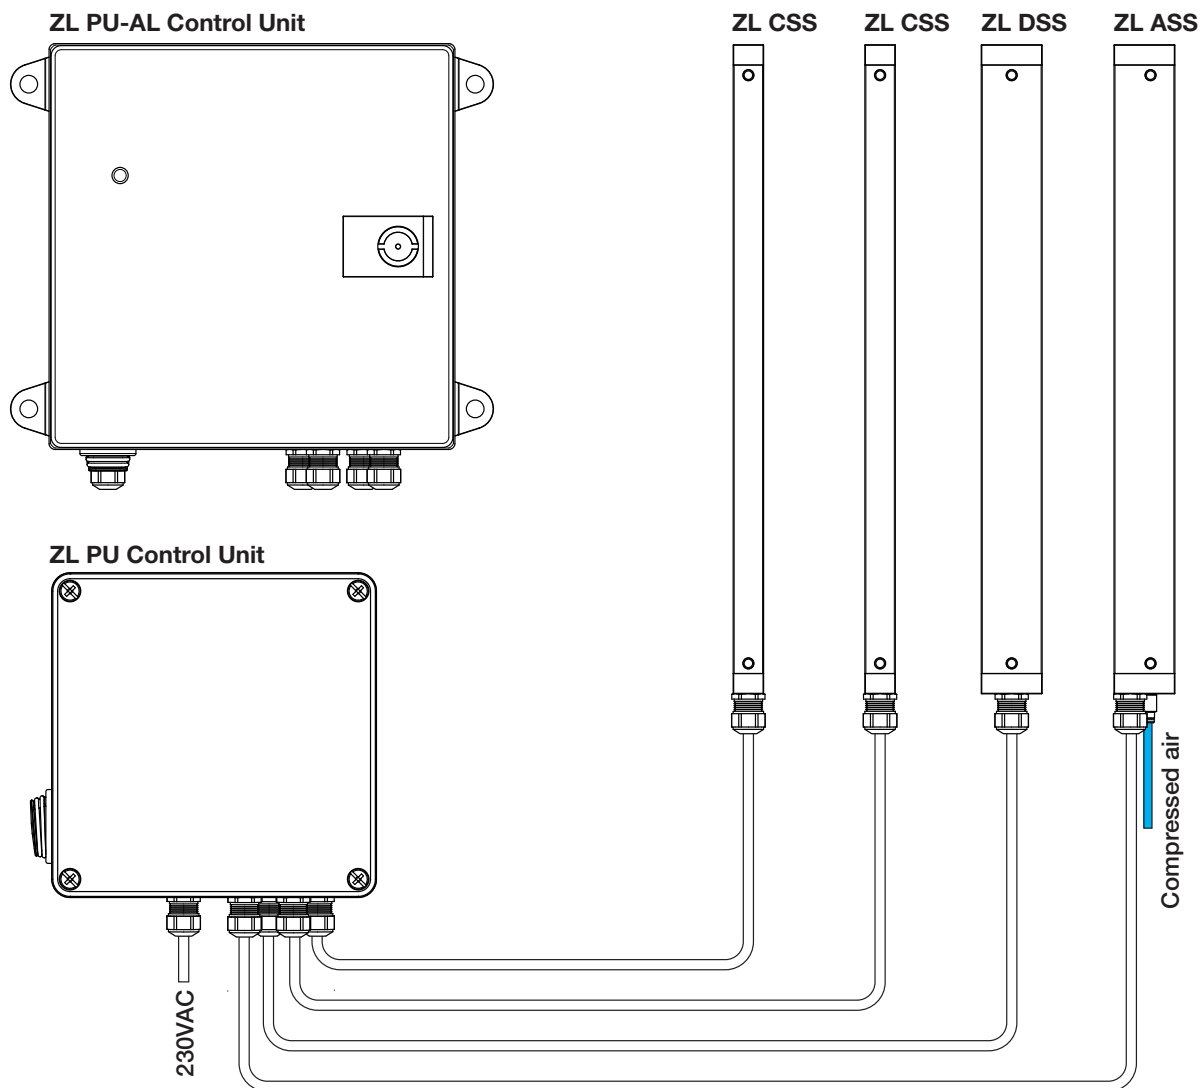

## Parts List

### ZL CSS Ionizer

Length: 200 - 2950 mm in 50 mm increments  
Order No.: ZL 9413XY

### ZL DSS Ionizer

Length: 200 - 2950 mm in 50 mm increments  
Order No.: ZL 9414XY

### ZL ASS Ionizer with Air Connection

Length: 200 - 2950 mm in 50 mm increments  
Order No.: ZL 9412XY

### ZL PU Control Unit - 4 Outputs

Order No.: ZL 940000

### ZL PU-AL Control Unit with Alarm - 4 Outputs

Order No.: ZL 940201

### ZL EB14 Splitter 1 in/4 out

Order No.: ZL 940047

### ZL HV High Voltage Cable

Length: 1.5 - 20 m

Order No.: ZL 943XYZ

